


Smarter by Design Stronger by Structure

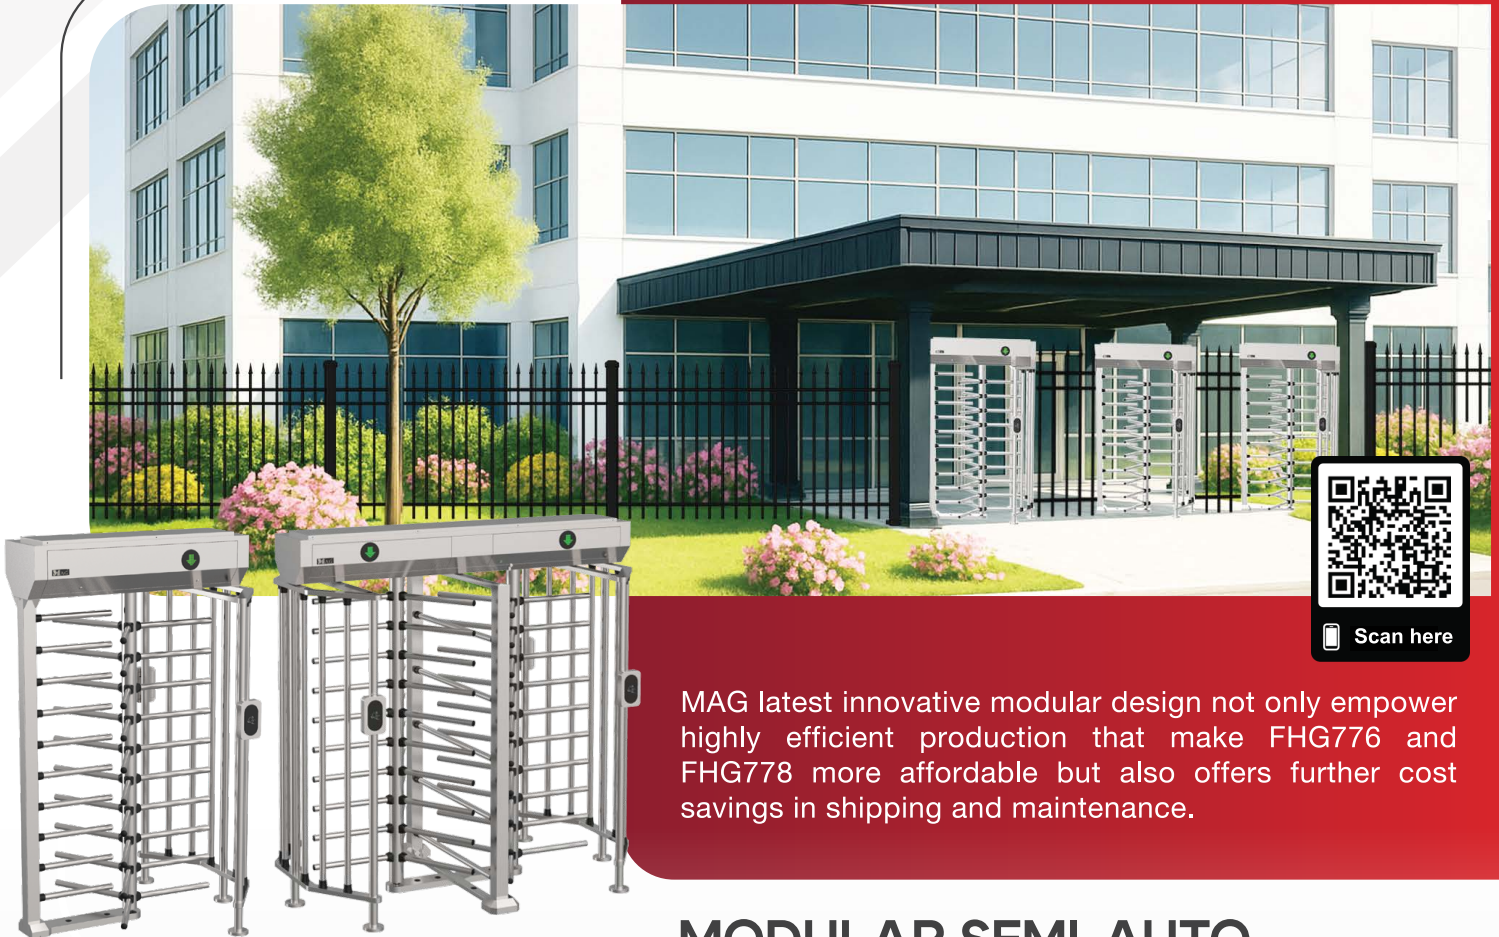

Scan here

MAG latest innovative modular design not only empower highly efficient production that make FHG776 and FHG778 more affordable but also offers further cost savings in shipping and maintenance.

FHG776
Single lane

FHG778
Dual lanes

MODULAR SEMI-AUTO FULL HEIGHT TURNSTILE

ENHANCED SECURITY

Elevate your facility's security with our SLAR machine core design that effectively prevent any unauthorized access by tailgating, crawling under or climbing over.



BETTER DURABILITY

Dual-screws InterLoc arm design eliminate fragile or inconsistent arm's welding point that over time, wear and tear or rough usage might cause cracks or breakdowns. This greatly enhance durability to cater higher traffic without spending more.

FEATURE


We want you to have peace of mind using our modular semi auto full height turnstile.

1 Effective anti-tailgate

Built on the proven reliability of our legacy Single Level Anti-Reverse (SLAR) design that uses precise angled locking mechanism to prevent tailgating ensuring only one person can pass through at a time. Guard can be reassigned to other more important tasks instead of supervising the entrance.


2 Robust performance

Extra big internal hydraulic damper absorbs excessive impact to reduce mechanical wear & tear thus increasing operation life time.

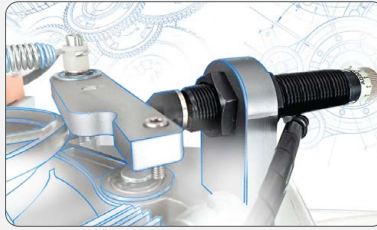


3 Lower shipment cost

Most parts can be disassembled reducing packaging size by 50% to significantly lower the transportation and storage costs while optimizing overall logistics.

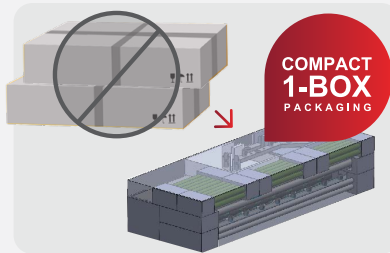


4 Simplified maintenance


If damaged due to rough handling or usage, most parts can be replaced individually without any welding to minimize down time. Just simply screw in the new parts. We offer full spare parts and repair service.

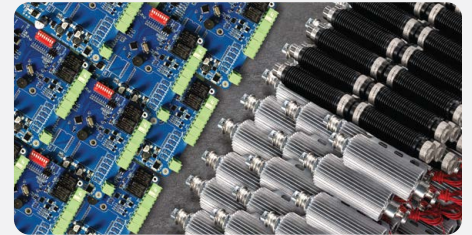

DIMENSION

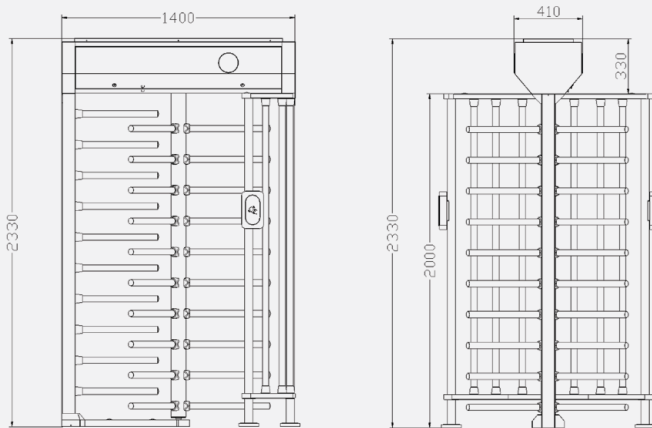

FHG776 Single lane

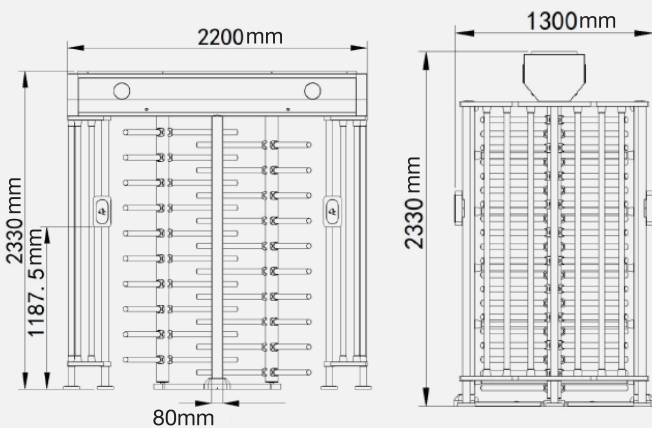


FHG778 Dual lanes

TECHNICAL PARAMETER


Description	Parameters
Body Material	SS304 stainless steel*
Dimension	FHG776 - 1400mm(L) x 1311mm(W) x 2330mm(H) FHG778 - 2200mm(L) x 1311mm(W) x 2330mm(H)
Passage Width	577mm
Optimal Flow Rate	20 to 25 people per minute
Arm Rotation Angle	120°
Power Supply Input	AC220/110V±10%,50/60Hz
Power Consumption	60W
Operating Voltage	24V DC
Working Environment	Indoor and well-shaded outdoor application
Working Temperature	-25°C -70°C
Relative Humidity	≤ 90%, non-condensing
Open Signal	Dry contact signal
Fire/ Emergency Alarm	Unlock and free for passing
IP Rating	IP44
MTBF	3 million cycle

*For coastal area application, please consult our sales personnel.

ACCESSORIES



Card access reader



Face Recognition with Fingerprint and QR

Authorised Dealer:

Copyright © 2026 Magnet Security & Automation Sdn Bhd All rights reserved.

All specification, drawing and product info are subject to change without prior notice.

