

SL300 AC Sliding Autogate

WWW.MAG.COM.MY



Description

MAG sliding gate system has been in the market for more than 10 years with proven reliability. It's design has been continuously refined to give you durable performance and yet easily affordable.




Features

- Less heat to support higher open/close duty cycle.
- Higher speed for faster opening / closing.
- Soft start to control for cushioning.
- Auto reverse feature using Photo Beam sensor or obstruction detection for safety
- Auto close feature, even when you away the gate will close the gate by itself
- Partial open feature for pedestrian usage

Technical Parameter

| Description | AC |
|-----------------------|------------------------------------------|
| Power | AC 240V |
| Motor RPM | 1400 max |
| Gate Weight | Nylon Gear 600KG, Metal Gear 800KG |
| Temperature Operating | 125°C ± 0.5 |
| Lubricate | Grease type |
| Power consumption | 370 watt |
| Travel Speed | 12 meter/min |
| Remote control | Effective range 30m, max 60m |
| Manual Option | Special release key during power failure |
| IP Rating | IP55 |

Dimension

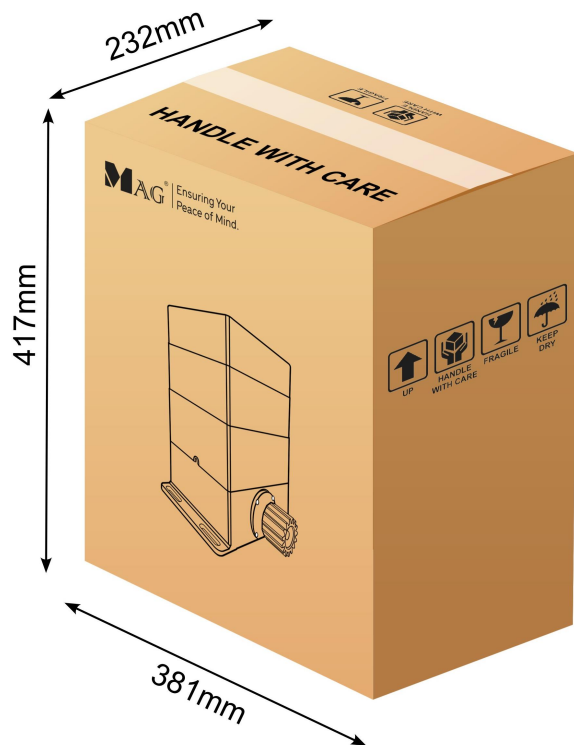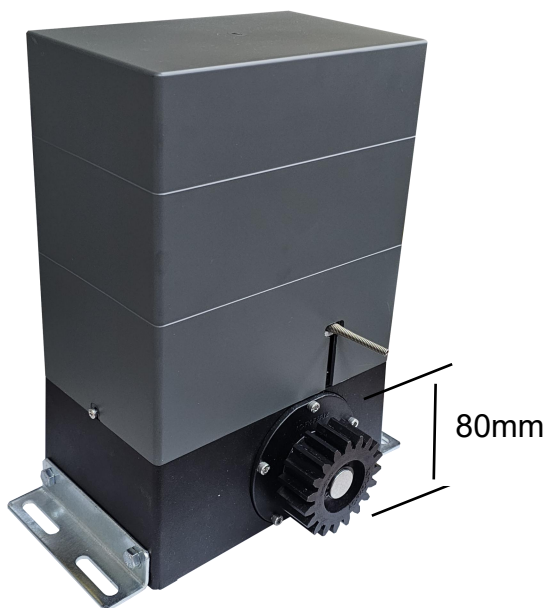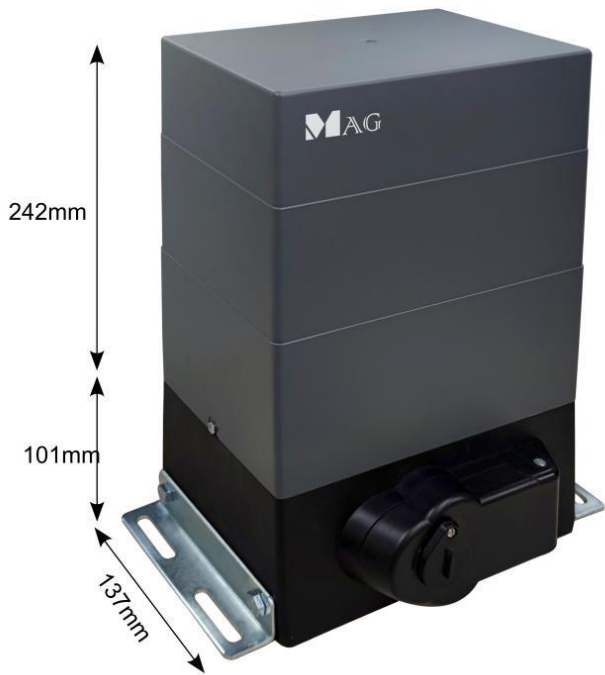

***Product performances is based on testing in a controlled environment. Your result may vary due to several external and environment factors.**

© COPYRIGHT 2024. This documentation served as a reference only. It is subject to change without further notice. All the diagrams and information in this documentation may not be duplicated or modified in any form without the written approval from the management.

© 2024 SP V2 SL300 AC

